




HYDRAULIC BREAKERS

DX SERIES

Floating power cell & bolt free enclosed housing

- Prevent carrier boom & arm fatigue failure
- No metal to metal contact
- Floating and fully enclosed power cell
- Extend breaker & carrier service life
- Low noise
- Suitable for all applications, particularly including trenching, quarry & mining



Lubrication

- Manual lube system

Advanced internal valve system

- Built in cylinder
- Energy efficiency
- Oil leakage free
- Thicker flesh cylinder block
- Least maintenance & repair requirement

Work mode selector

- Optimize power and speed upon application requirements
- Enable maximum productivity in all applications from light to severe duty material breaking
- Available for DandA 70DX & above

Easy start

- Fast response time to breaker activation signal
- Significantly increase productivity at light or interior demolition applications
- Suitable for skid steer loader breaker applications
- Available for DandA 17V, 40V & 60V

Large capacity accumulator & diaphragm

- Proactively prevent carrier hydraulic part fatigue failure
- Accelerate striking performance
- Prevent cavitation
- Increase seal & diaphragm service life
- Available for DandA 40V & above (excluding skid steer loader breaker)

Working tool

- Heat treatment of core as well as surface
- Optimum balance for longer wear life and crack prevention
- Variety of conventional and special tool types

Bottom plate


- Anti-abrasive high tensile raw material
- Fully enclosed lower bush & front head block
- Minimize debris & dust entering percussion chamber
- Increase service life of housing, tool, lower bush & front head

Large capacity gas chamber & optimum piston size

- Hybrid energy efficiency design
- Higher impact power delivery
- Least oil flow consumption
- Durable piston design - larger surface contacting working tool
- Dampening repercussion vibration force
- Preventing carrier structure fatigue failure

External gas charging

- Gas charging from external housing
- No need of housing or lubrication device disassembly
- Least maintenance time
- Designed for maintenance at the job site



Air supply channel

- Built in air supply channel
- Prepared for underwater, tunneling & severe dusty applications



Anti-blank firing system (auto stop)

- Auto cut off hydraulic power when the material is fully broken
- Ensure service life of tool pin, working tool, front head, piston, through bolt and diaphragm even at the frequent dry firing applications such as rental, secondary rock breaking & scaling
- Available for DandA 60DX and 100DX & above

Heavy duty front head block

- Significantly enhanced front head duty level Extend front head service life
- Available for DandA 130DX & above

Tool pin hole protector

- Minimize direct contact between holes and material to break
- Protect tool pin hole damage from debris
- Prevent hole cover missing and debris/dust entering
- Extend tool pin and working tool wear life

Large size tool pin



- Heavy duty oval shape dual pins
- Heat-treated, enlarged size
- Longer wear life
- Maintenance friendly design - bolt free, rubber plugged holes
- Available for DandA 70DX & above

Bushes

- Differentiated anti-wear raw material
- Higher core hardness
- Much longer wear life

Dust protector

- Prevent dust entering percussion chamber
- Prolong lubricant's stay between bushes & working tool
- Prevent contamination
- Secure service life of seal, bush, working tool, piston & cylinder in severe dusty applications
- Available for DandA 130DX & above

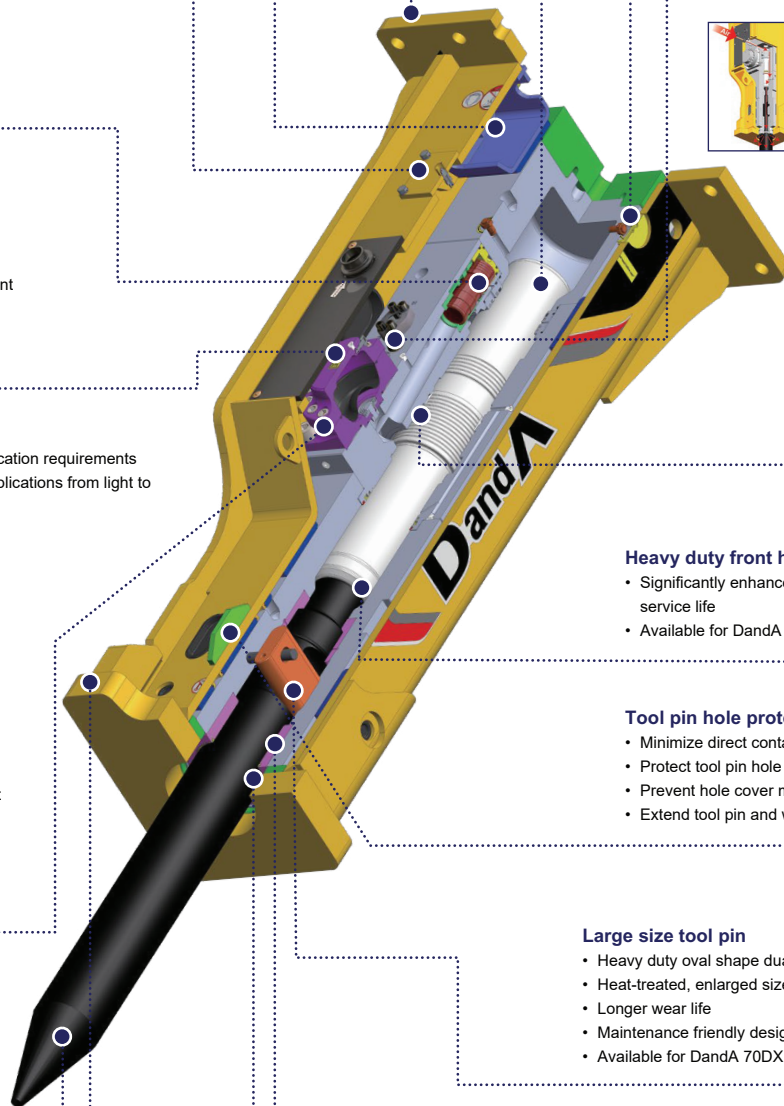

Comprehensive product line up

- 23 breaker models that cover the entire CE industry carrier range from 0.5 to 140 ton
- 1 model variant exclusively designed for dedicated light material breaking champion with 18 to 22 ton carrier
- 4 model variants exclusively designed for skid steer loader
- On-demand housing variants for optimum traveling position with backhoe loader
- Suitable from light and medium to hard & severe duty rock breaking applications

Compact breaker

			DandA 6V	DandA 7V	DandA 8V	DandA 17V	DandA 40V	DandA 60V	DandA 70DX	DandA 80DX
Operating weight	kg		80	105	141	184	325	412	518	600
	lb		176	232	311	406	717	908	1,143	1,323
Required oil flow	l/min		15~21	12~25	13~30	20~60	29~60	34~68	38~85	42~85
	g/min		3.96~5.55	3.17~6.60	3.43~7.93	5.28~15.85	7.66~15.85	8.98~17.96	10.04~22.45	11.10~22.45
Operating pressure	kg/cm ²		60~130	90~120	90~120	90~120	110~165	120~165	140~170	140~170
	psi		853~1,849	1,280~1,707	1,280~1,707	1,280~1,707	1,565~2,347	1,707~2,347	1,991~2,418	1,991~2,418
Number of blow	Power mode	bpm								
	Speed mode	bpm	800~1,200	800~1,400	550~1,000	600~1,500	380~1,000	380~900	400~800	350~700
Relief valve setting pressure	kg/cm ²		175	175	175	175	175	175	175	175
	psi		2,489	2,489	2,489	2,489	2,489	2,489	2,489	2,489
Tool diameter	mm		40	40	45	57	70	75	80	90
	inch		1.57	1.57	1.77	2.24	2.76	2.95	3.15	3.54
Suitable carrier	ton		0.5~2.0	0.5~2.0	0.8~2.5	1.5~4.0	3.0~6.5	4.5~8.0	4.5~8.0	6.0~10.0
	lbs		1,102~4,409	1,102~4,409	1,764~5,512	3,307~8,818	6,614~14,330	9,921~17,637	9,921~17,637	13,228~22,046

* Above numbers are subject to change without prior notice, only provided for references in combination with carrier hydraulic performance.

* Above operating weight includes 1 working tool, 2 hoses and 1 mounting bracket with 2 pins that are supplied by the manufacturer only.

Medium breaker

			DandA 100DX	DandA 130DX	DandA 150DX	DandA 180DX	DandA 200DX	DandA 220DX	DandA 250DX	DandA 300DX
Operating weight	kg		875	1,012	1,231	1,448	1,577	1,845	2,021	2,507
	lb		1,929	2,231	2,714	3,192	3,477	4,068	4,456	5,527
Required oil flow	l/min		63~102	68~119	85~127	85~131	102~132	119~161	127~178	153~204
	g/min		16.64~26.95	17.96~31.44	22.45~33.55	22.45~34.61	26.95~34.87	31.44~42.53	33.55~47.02	40.42~53.89
Operating pressure	kg/cm ²		140~180	140~190	140~190	150~190	160~190	160~190	160~190	160~190
	psi		1,991~2,560	1,991~2,702	1,991~2,702	2,134~2,702	2,276~2,702	2,276~2,702	2,276~2,702	2,276~2,702
Number of blow	Power mode	bpm	350~600	350~550	320~550	320~500	320~480	340~450	270~400	250~380
	Speed mode	bpm	600~900	600~900	400~700	400~650	400~600	420~550	330~500	300~450
Relief valve setting pressure	kg/cm ²		210	210	210	210	210	210	210	210
	psi		2,987	2,987	2,987	2,987	2,987	2,987	2,987	2,987
Tool diameter	mm		95	105	115	125	135	135	145	150
	inch		3.74	4.13	4.53	4.92	5.31	5.31	5.71	5.91
Suitable carrier	ton		8.0~12.5	10~15	12~18	16~22	18~24	20~26	24~30	25~36
	lbs		17,637~27,558	22,046~33,069	26,455~39,683	35,274~48,502	39,683~52,911	44,092~57,320	52,911~66,139	55,116~79,366

* Above numbers are subject to change without prior notice, only provided for references in combination with carrier hydraulic performance.

* Above operating weight includes 1 working tool, 2 hoses and 1 mounting bracket with 2 pins that are supplied by the manufacturer only.

Large breaker

			DandA 360DX	DandA 450DX	DandA 550DX	DandA 650DX	DandA 700DX	DandA 750DX	DandA 1200DX
Operating weight	kg		2,770	3,487	4,099	4,486	5,838	6,710	9,564
	lb		6,107	7,688	9,037	9,890	12,871	14,793	21,085
Required oil flow	l/min		170~221	187~238	204~272	221~306	238~323	255~340	298~383
	g/min		44.91~58.38	49.40~62.87	53.89~71.85	58.38~80.84	62.87~85.33	67.36~89.82	78.72~101.18
Operating pressure	kg/cm ²		160~190	150~190	150~190	150~190	170~210	170~210	170~210
	psi		2,276~2,702	2,134~2,702	2,134~2,702	2,134~2,702	2,418~2,987	2,418~2,987	2,418~2,987
Number of blow	Power mode	bpm	230~400	230~345	230~330	270~380	220~300	205~285	170~230
	Speed mode	bpm	270~470	270~410	270~500	380~530	290~400	235~420	195~275
Relief valve setting pressure	kg/cm ²		230	230	210	210	250	250	250
	psi		3,271	3,271	2,987	2,987	3,556	3,556	3,556
Tool diameter	mm		155	165	175	180	200	205	240
	inch		6.10	6.50	6.89	7.09	7.87	8.07	9.45
Suitable carrier	ton		28~42	34~50	40~60	45~80	58~100	60~100	85~140
	lbs		61,729~92,594	74,957~110,231	88,185~132,277	99,208~176,370	127,868~220,462	132,277~220,462	187,393~308,647

* Above numbers are subject to change without prior notice, only provided for references in combination with carrier hydraulic performance.

* Above operating weight includes 1 working tool, 2 hoses and 1 mounting bracket with 2 pins that are supplied by the manufacturer only.



Product designs and/or specifications may be changed at any time without prior notice. All rights reserved.



SHREE MAHALAXMI ENTERPRISES

Address (M.P): 10/2,Raukhedi, Near,Mangliya Toll Plaza,A.B Road
Indore, (Madhya Pradesh) - 453771

Address (Kerala): KMC-33/411-J, Mahadevaa Commercial Centre,Nellikunnu
Beach Road, Kasaragod (Kerala) - 671121

Contact: +91 73564 79764 | +91 94253 12051

